
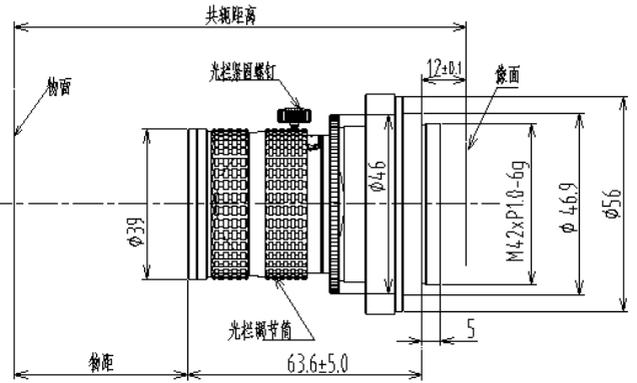


LLA02-3528M

产品介绍



※最大支持 $\phi 32$ mm像面、超低畸变、防震设计、倍率覆盖0.15X~0.25X。


LLA02-3528M

产品参数

| | | | |
|-----------|-------------------------------|-----|------|
| 型号 | LLA02-3528M(货号: #12501+00501) | | |
| 最大像面 (mm) | $\phi 32$ | | |
| 分辨率(um) | 7 | | |
| 基准倍率(X) | 0.15 | 0.2 | 0.25 |
| 光圈 | 2.8~16 | | |
| 焦距 (mm) | 35 | | |
| 畸变 | <0.05% | | |
| 相对照度 | 65% | | |
| 工作距离 (mm) | 245 | 190 | 152 |
| 共轭距 (mm) | 318 | 264 | 229 |
| 接口 | M42 /M72/F口 | | |

LLA02-3528M


产品案例




瑕疵检测



表面纹路及色彩检测



PCB板缺陷检测



线路检测

